




WOOD AND GLASS SHELVING SYSTEMS

3




ITALIANA
ferramenta



SYMBOLS AND FINISHES LEGEND

SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= NEWTON



= PART.NO



= HEXAGONAL SOCKET



= FRICTION



= PCS. PER PACKAGE



= BLADE SLOT



= AUTOMATIC



= COMBI SLOT



= DROP DOWN



= CAPACITY LOADING



= COUNTERSUNK HEAD



= WOOD / GLASS THICKNESS



= PAN HEAD



= STANDARD HINGE



= HOLE DIAMETER



= FLANGE HEAD



= KIMANA HINGE



= DIAMETER



= FLAT HEAD



= FLAP HINGE



= LENGTH



= TRILOBULAR SCREW



= WITH SPRING



= HEIGHT



= SELF-TAPPING SCREW



= WITHOUT SPRING



= RIGHT VERSION



= EURO THREAD



= REVERSED SPRING



= LEFT VERSION



= METRIC THREAD



= PRE-INSERTED SCREW



= FOR ROUND TUBE



= PCS. PER PAD



= PRE-INSERTED SCREW AND SPREADING BUSH



= FOR OVAL TUBE



= CUT ON REQUEST



= WITH BUFFER



= SELF ADHESIVE



= WITH MAGNET



= WITH FLANGE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accuracy. We reserve the right to alter specifications without notice.




MATERIALS

ZA = Zinc Alloy	ST = Steel	HSS = High Speed Steel	BR = Brass	ABS = Acrylonitrile Butadiene Styrene
ZAnk = Nickel-plated Zinc Alloy	STzk = Zinc-plated Steel	AL = Aluminium	WD = Wood	EVA = Ethylene Vinyl Acetate

EP = ENGINEERING PLASTIC	SR = SOFT RUBBER
+ EP = other engineering plastic available on request	+ SR = other soft rubber available on request

EPn = Natural Engineering Plastic	EPc = Clear Engineering Plastic	SRn = Natural Soft Rubber
EPw = White Engineering Plastic	EPg = Grey Engineering Plastic	SRw = White Soft Rubber
EPwg = Water Green Engineering Plastic		SRb = Black Soft Rubber

 FINISHES	+  = OTHER FINISHES AVAILABLE ON REQUEST
---	---

PART. NO	FINISHES	PART. NO	FINISHES	PART. NO	FINISHES
AA	Natural	JB	Bright Aluminium	PZ	Beech
AB	White	JC	Aluminium - Chrome	QA	Maple
AC	Opal White	JD	Matt Aluminium	QB	Walnut
AE	White 9010	JE	Satin-finished Aluminium	WA	Bronzed
AK	Champagne	JF	Aluminium - Brass	WI	Burnished
AL	Ivory	JG	Aluminium 5	XD	Satin-finished Steel
EA	Black	JL	Aluminium PE 11	YA	Nickel-plated
EB	Glossy Black	JM	Aluminium RAL 9006	YB	Bright Nickel-plated
EC	Matt Black	KA	Chrome	YC	Matt Nickel-plated
GR	Raw	KB	Bright Chrome	YD	Satin-finished Nickel-plated
HA	Brass-Plated	KC	Matt Chrome	ZA	Zinc alloy
HH	Tropicalized	MA	Brown	ZN	Zinc-plated
HL	Raw Brass	MB	Light Brown 1	ZQ	Bright Gold
IA	Grey	NN	Metallic Beige	ZY	Titanium
IB	Metallic Grey	NO	Beige	ZZ	Clear
IF	Middle Grey	OA	Oak	00	Insignificant finish
IJ	Light Grey	OZ	Ash		
IL	Grey 20	PA	Light Ash		
JA	Aluminium	PY	Cherry		

CONTENTS

SHELF SUPPORTS

SECURY PALETTA	1.1
MINISECURITY	1.1
PULL-IN CORNER BRACKET	1.3
K LINE	1.4
DUAL	1.6
SHELF RETAINER	1.7
FLIPPER	1.8
FLIPPER-BI	1.12
UNICO	1.16
SPRING	1.19
KERALA	1.21
MAORI	1.23
TRIS	1.30
TRIS SIDE BRACKET ROUND LEDGE	1.37
PK2	1.42
PK2 SIDE BRACKET ROUND LEDGE	1.53
BLITZ	1.58
BLITZ SIDE BRACKET ROUND LEDGE	1.65
POKER	1.68
SECRET MAXI	1.78

GLASS SHELF SUPPORTS

DREAM	2.1
K LINE	2.2
VERY	2.4
OR	2.4
ATAK	2.5
GEKO	2.6
KRISTAL	2.7
COBRA	2.11
PEKI	2.15
KUBIC	2.17
PULL	2.20

WOOD AND GLASS SHELVING SYSTEMS

KAIMAN	3.1
KAIMAN MAXI	3.3
KALABRONE	3.5
KALABRONE MAXI	3.7
KALABRONE MINI	3.9
COBRONE	3.10
TRIADE MINI	3.12
TRIADE MINI AND BRACKET	3.14
TRIADE	3.16
TRIADE AND BRACKET	3.18
TRIADE MAXI	3.20
TRIADE MAXI AND BRACKET	3.22
TRIADE XXL	3.24
TRIADE XXL AND BRACKET	3.26
APPLICATION FOR ALL TRIADE VERSIONS	3.28

CONNECTINGS

INSERT NUTS	4.1
SPREADING DOWELS	4.2
DOWELS	4.3
SLEEVES	4.4
FLAT HEAD SLEEVE NUTS AND CONNECTING SCREWS	4.5
SLEEVE NUTS AND CONNECTING SCREWS	4.6
PULL-IN CORNER BRACKET	4.7
IN FRAME DOOR (DOOR STOP AND CORNER BRACKET)	4.8
PAD	4.10
CROSS DOWELS	4.11
CAMS AND DOWELS	4.18
ELEFANT	4.25
SPIRAL LOCK	4.28
PLINTH CLIPS	4.31

WORKTOP CONNECTORS

QUICK	5.1
BOX FOR QUICK Ø30	5.5

SCREWS

COUNTERSUNK HEAD WOOD SCREWS	6.1
PAN HEAD WOOD SCREWS	6.1
EURO SCREWS	6.2
FLANGE HEAD METRIC SCREWS	6.3
COUNTERSUNK HEAD METRIC SCREWS	6.3
ONE PIECE CONNECTOR SCREWS	6.4
ALLEN WRENCHES	6.6

DOOR BUFFERS AND COVER CAPS

BI-MATERIAL	7.1
SOFT	7.1
DOOR BUFFERS	7.2
COVER CAPS	7.6
ECCENTRIC HOUSING COVER CAPS	7.8
NIKO	7.8.1
ADHESIVE HOLE COVERS	7.9

OPENING SYSTEMS FOR FLAP AND DROP DOWN DOORS**8**

KRABY LIFT UP WITH STANDARD HINGES	8.1
KRABY 164 mm LIFT UP	8.2
KRABY 244 mm LIFT UP	8.4
KRABY 355 mm LIFT UP	8.6
KRABY 480 mm LIFT UP	8.8
KRABY LIFT UP WITH STANDARD HINGES WITH K PUSH WITH MAGNET	8.9
KRABY DROP DOWN WITH STANDARD HINGES	8.12
KRABY 164 mm DROP DOWN	8.13
KRABY 244 mm DROP DOWN	8.14
KRABY 355 mm DROP DOWN	8.15
KRABY DROP DOWN WITH KIMANA HINGES AND MAGNET K LOCK	8.16
KRABY DROP DOWN WITH FLAP HINGES AND MAGNET K LOCK	8.20
KRABY DROP DOWN WITH STANDARD HINGES AND K PUSH WITH MAGNET	8.23
KRABY DROP DOWN WITH KIMANA HINGES AND K PUSH WITH MAGNET	8.26
KRABY DROP DOWN WITH FLAP HINGES AND K PUSH WITH MAGNET	8.30
KRABY BRACKETS	8.33
KRABY ADAPTERS FOR ALUMINIUM FRAME DOOR	8.35
COMPACT LIFT UP WITH STANDARD HINGES	8.39
COMPACT 164 mm LIFT UP	8.40
COMPACT 244 mm LIFT UP	8.42
COMPACT 355 mm LIFT UP	8.44
COMPACT 480 mm LIFT UP	8.46
COMPACT LIFT UP WITH STANDARD HINGES WITH K PUSH WITH MAGNET	8.47
COMPACT DROP DOWN WITH STANDARD HINGES	8.50
COMPACT 164 mm DROP DOWN	8.51
COMPACT 244 mm DROP DOWN	8.52
COMPACT 355 mm DROP DOWN	8.53
COMPACT DROP DOWN WITH KIMANA HINGES AND MAGNET K LOCK	8.54
COMPACT DROP DOWN WITH FLAP HINGES AND MAGNET K LOCK	8.58
COMPACT DROP DOWN WITH STANDARD HINGES AND K PUSH WITH MAGNET	8.61
COMPACT DROP DOWN WITH KIMANA HINGES AND K PUSH WITH MAGNET	8.64
COMPACT DROP DOWN WITH FLAP HINGES AND K PUSH WITH MAGNET	8.68
COMPACT BRACKETS	8.71
COMPACT ADAPTERS FOR ALUMINIUM FRAME DOOR	8.72

PUSH CATCHES & MAGNETIC CATCHES**9**

K PUSH	9.1
K LOCK	9.8
K PUSH AND K LOCK DOOR PLATES	9.10

LEVELLERS**10**

INTEGRATO WITH ZINC ALLOY FOOT	10.1
INTEGRATO WITH ENGINEERING PLASTIC FOOT	10.7
INTEGRATO SPACERS	10.16
INTEGRATO Z	10.18
DEDALO	10.20
LEVELLER Ø14	10.23
REKORD 12	10.28
ATACAMA	10.34
ATACAMA J	10.38
ATACAMA J WITH HEIGHT ADAPTER	10.40.3

HINGES**11**

KIMANA	11.1
KIMANA ADAPTERS	11.5

HANGERS**12**

LIBRA HANGING SYSTEM LIVING SETTINGS	12.1
LIBRA H1 - H2 - H3 - H4 LIVING SETTINGS	12.2
LIBRA H1	12.3
LIBRA H2	12.5
LIBRA H3	12.8
LIBRA H4	12.11
LIBRA H6 AND LIBRA CH APPLICATIONS	12.14
LIBRA H6 LIVING SETTINGS	12.16
LIBRA H6	12.17
LIBRA H6 AND LBRA CH LIVING SETTINGS	12.20
LIBRA CH	12.21
LIBRA H7 APPLICATIONS	12.24
LIBRA H7 SCREW FIXING LIVING SETTINGS	12.26
LIBRA H7 SCREW FIXING	12.27
LIBRA H7 DOWEL FIXING WITH ALUMINIUM BAR LIVING SETTINGS	12.30
LIBRA H7 DOWEL FIXING WITH ALUMINIUM BAR	12.31
LIBRA H7 SCREW FIXING WITH "PEG JOINT" FOR ALUMINIUM BAR	12.36
LIBRA H7 DOWEL FIXING WITHOUT "PEG JOINT"	12.38
LIBRA H7 AND LIBRA CH LIVING SETTINGS	12.39
LIBRA H7 AND LIBRA CH APPLICATIONS	12.40
LIBRA WALL PLATES	12.42
LIBRA COVER CAPS	12.44
LIBRA BS APPLICATIONS	12.46
LIBRA BS	12.48
LIBRA BS LEVELLER	12.59
LIKU	12.63

WARDROBE TUBES SUPPORTS**13**

WARDROBE TUBES SUPPORTS	13.1
ELITE	13.2
LEADER	13.3

KAIMAN



7-41 mm




25 kg for each shelf support
for shelf 320 mm deep




INSTALLATION AND ADJUSTMENTS

WOOD PANEL



Recommended fixing countersunk
screw type - head Ø 5 mm max.

SOLID AND PLASTERBOARD WALLS




It is the responsibility of the customer:



- to ensure that the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

BRACKET ALIGNMENT

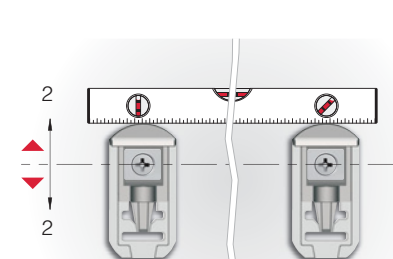



SHELF LOCKING AND INCLINATION ADJUSTMENT

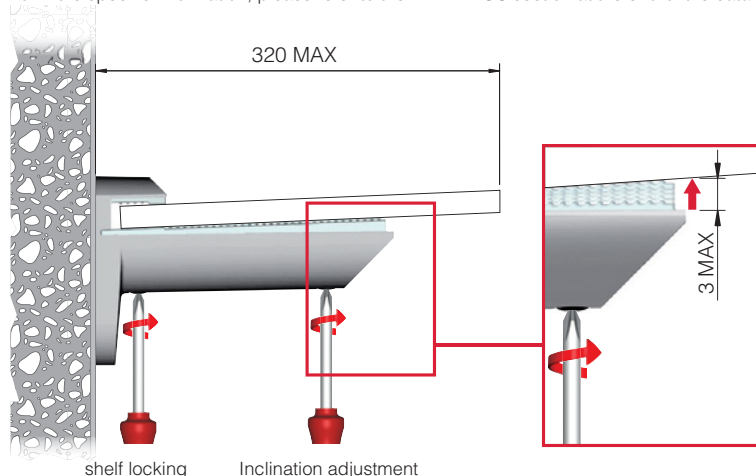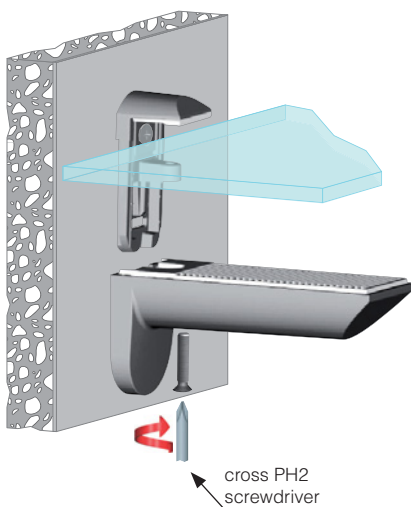

shelf locking Inclination adjustment


COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

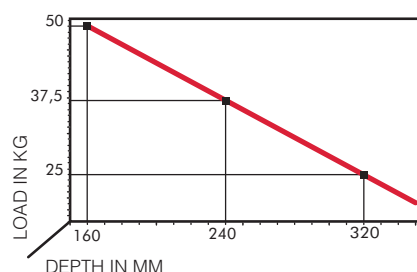


+ shelf weight = 25 kg MAX for
each shelf support

POSITION OF THE RIDGE PLATE

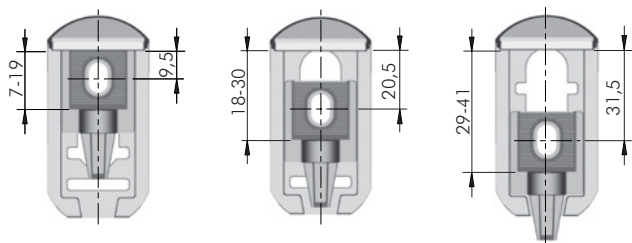


Glass shelves

Wood and honeycomb shelves

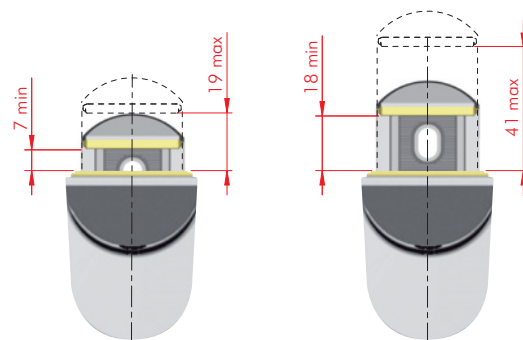


Shelf is clamped between a layer of ridged plastic on both the lower and upper side (coloured parts).

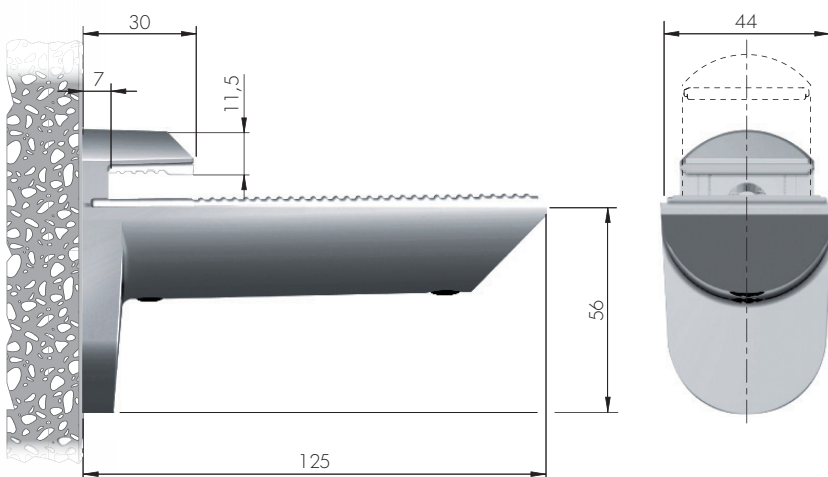

= PH2 	= 25 pairs
123 16102020JL 16102020YD 16102020KB 16102020ZQ	

NOTE: KAIMAN is supplied in carton box including 2 pieces, accessories and fitting guide. Countersunk fixing screws Ø 5x50 and rawlplugs Fischer SX Ø 8x40 to wall are included.

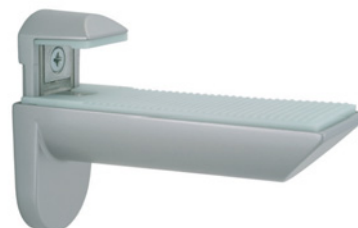

KAIMAN MAXI



39-73 mm




25 kg for each shelf support
for shelf 320 mm deep




INSTALLATION AND ADJUSTMENTS

WOOD PANEL




Recommended fixing countersunk
screw type - head Ø 5 mm max.




SOLID AND PLASTERBOARD WALLS



BRACKET ALIGNMENT


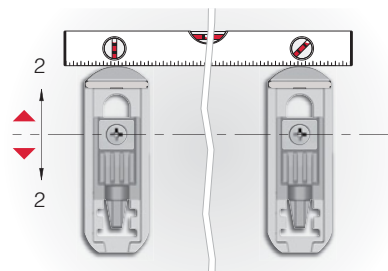


SHELF LOCKING AND INCLINATION ADJUSTMENT

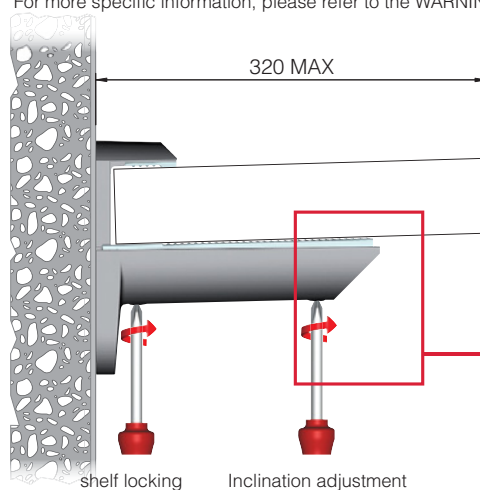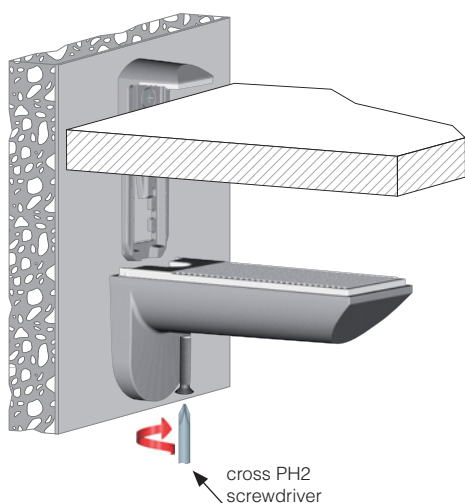


COMBINATION SHELF LOAD AND SHELF DEPTH


(The figures refer to 1 shelf support)

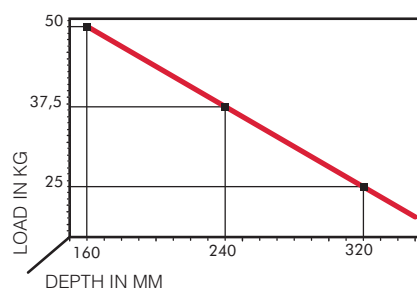



POSITION OF THE RIDGE PLATE

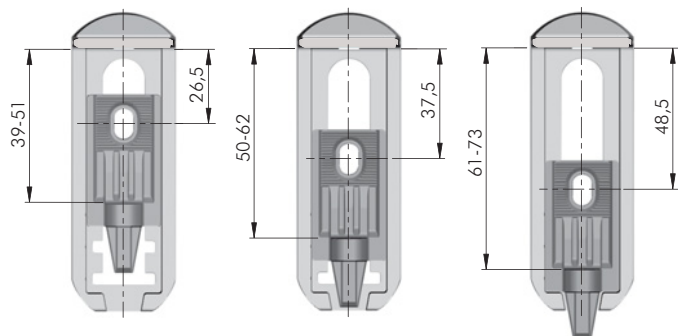

Wood and honeycomb shelves

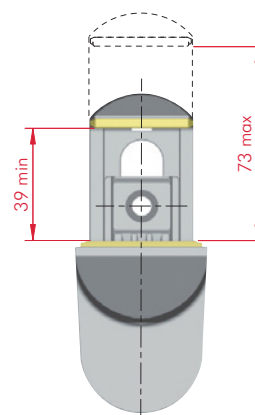

Shelf is clamped between a layer of ridged plastic on both the lower and upper side (coloured parts).

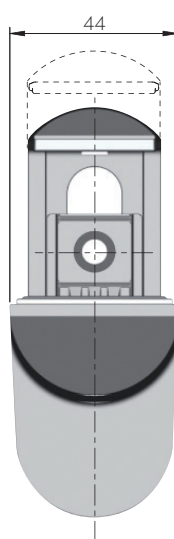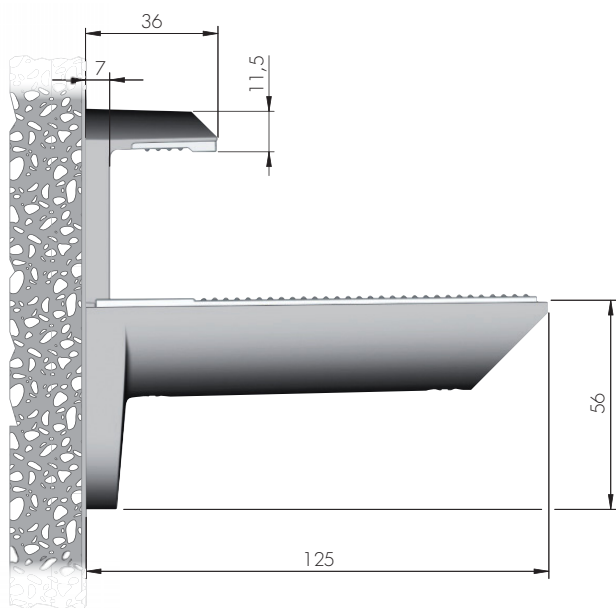

= PH2 	= 25 pairs
123 16105010JL 16105010YD 16105010KB 16105010ZQ	

NOTE: KAIMAN MAXI is supplied in carton box including 2 pieces, accessories and fitting guide. Countersunk fixing screws Ø 5x50 and rawlplugs Fischer SX Ø 8x40 to wall are included.



KALABRONE



8-30 mm



25 kg for each shelf support
for shelf 320 mm deep




REGISTERED DESIGN




INSTALLATION AND ADJUSTMENTS

WOOD PANEL




Recommended fixing countersunk
screw type - head Ø 5 mm max.


SOLID AND PLASTERBOARD WALLS



BRACKET ALIGNMENT

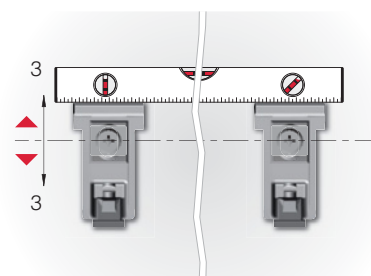


SHELF LOCKING AND INCLINATION ADJUSTMENT

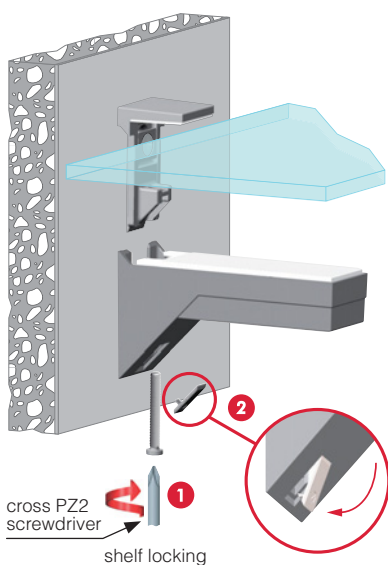

It is the responsibility of the customer:



- to ensure that the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

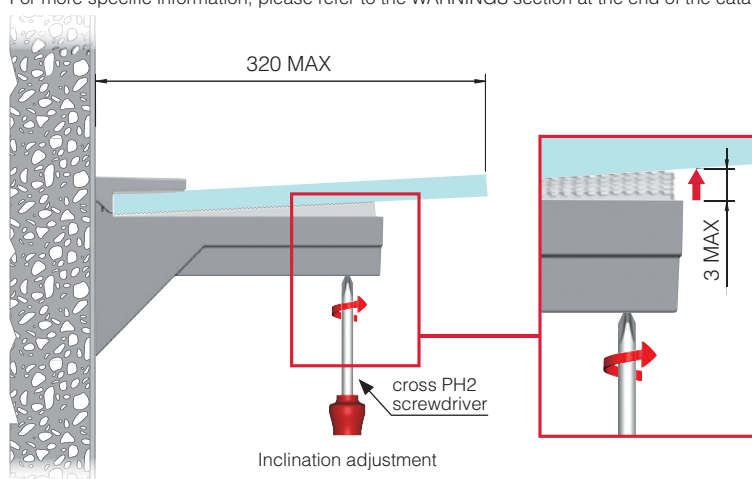

COMBINATION SHELF LOAD AND SHELF DEPTH


(The figures refer to 1 shelf support)

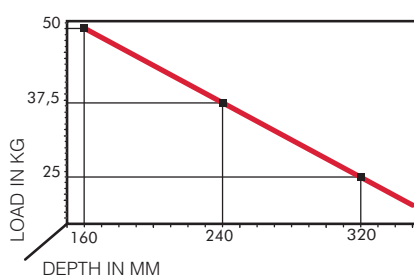


+ shelf weight = 25 kg MAX
for each shelf support

WOOD AND GLASS SHELVING SYSTEMS

Glass, wood and honeycomb shelves



Shelf is clamped between a layer of ridged plastic on the lower side and soft rubber on the upper side (coloured parts).

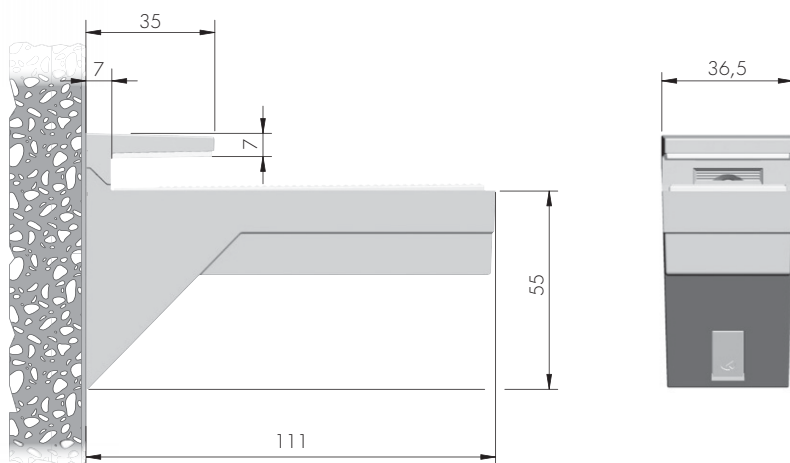

= PZ2 - PH2		
		= 24 pairs
16220010JM		
16220010YD		
16220010AE		
16220010KB		

NOTE: KALABRONE is supplied in carton box including 2 pieces, accessories and fitting guide. Fixing screws to wall not included.



KALABRONE MAXI



25-50 mm



25 kg for each shelf support
for shelf 320 mm deep




REGISTERED DESIGN




INSTALLATION AND ADJUSTMENTS

WOOD PANEL




Recommended fixing countersunk
screw type - head Ø 5 mm max.



SOLID AND PLASTERBOARD WALLS



BRACKET ALIGNMENT


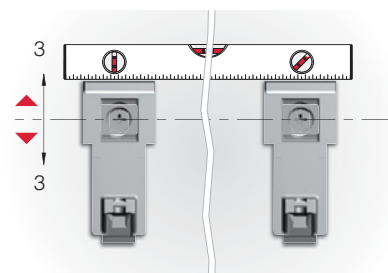


SHELF LOCKING AND INCLINATION ADJUSTMENT

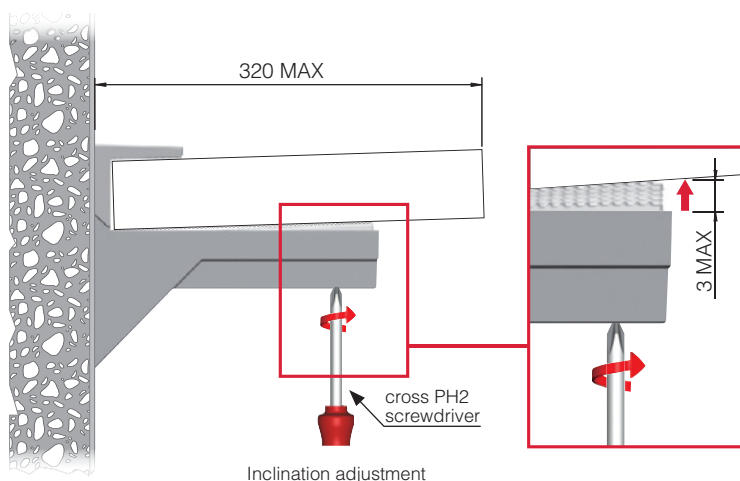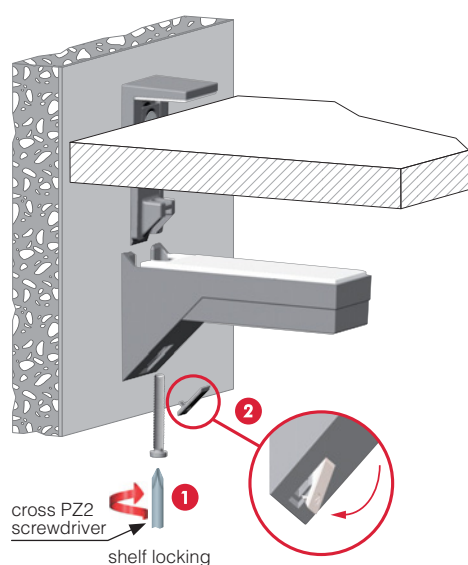

COMBINATION SHELF LOAD AND SHELF DEPTH


(The figures refer to 1 shelf support)

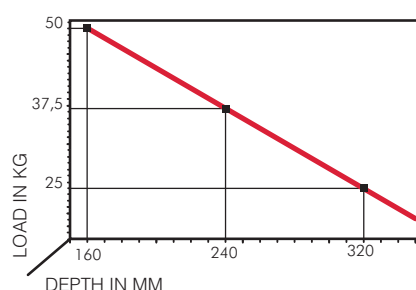


+ shelf weight = 25 kg MAX
for each shelf support

WOOD AND GLASS SHELVING SYSTEMS

Wood and honeycomb shelves



Shelf is clamped between a layer of ridged plastic on the lower side and soft rubber on the upper side (coloured parts).

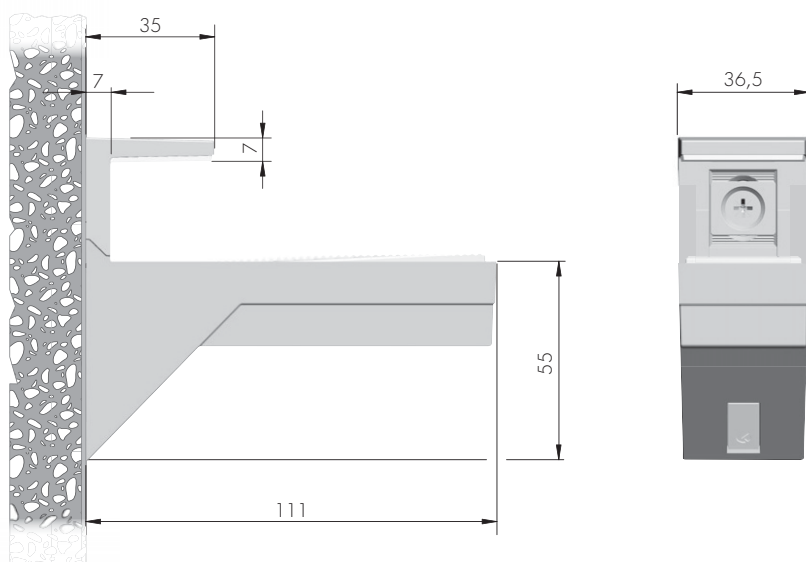

NOTE: KALABRONE MAXI is supplied in carton box including 2 pieces, accessories and fitting guide. Fixing screws to wall not included.

= PZ2 - PH2		
= 24 pairs		
16220030JM		
16220030YD		
16220030AE		
16220030KB		



KALABRONE MINI




5-10 mm

6 kg for each shelf support
for shelf 150 mm deep

REGISTERED DESIGN


INSTALLATION AND ADJUSTMENTS

WOOD PANEL




Recommended fixing countersunk screw type - head Ø 5 mm max.

SOLID AND PLASTERBOARD WALLS




It is the responsibility of the customer:
- to ensure that the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.
For more specific information, please refer to the WARNINGS section at the end of the catalogue.

BRACKET ALIGNMENT

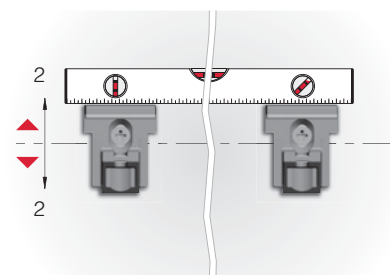


Glass shelves





Shelf is clamped between a layer of white soft rubber on both the lower and upper side (coloured parts).

SHELF LOCKING

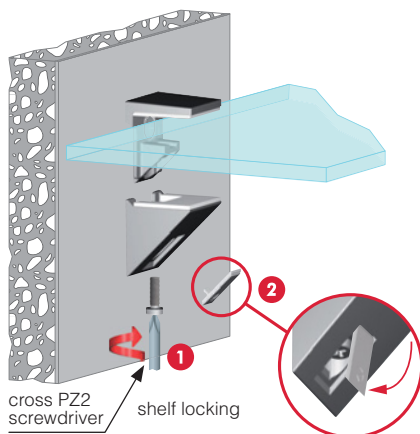


COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

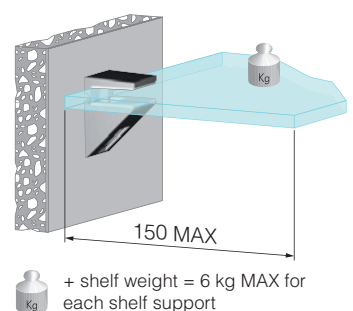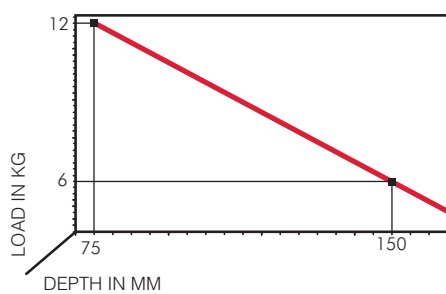

+ shelf weight = 6 kg MAX for each shelf support

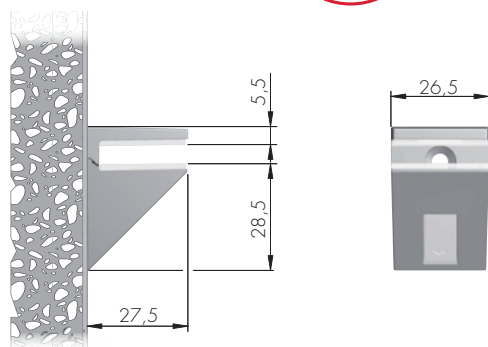

Note: KALABRONE MINI is supplied individually bagged with fitting guide.

= PZ2

= 100 pcs.

16220080JM
 16220080KB
 16220080YD

WOOD AND GLASS SHELVING SYSTEMS

COBRONE



5-10 mm




3 kg for each shelf support
for shelf 150 mm deep



INSTALLATION AND ADJUSTMENTS

WOOD PANEL



Recommended fixing countersunk screw type - head \varnothing 5 mm max.


SOLID AND PLASTERBOARD WALLS




It is the responsibility of the customer:
- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

BRACKET ALIGNMENT

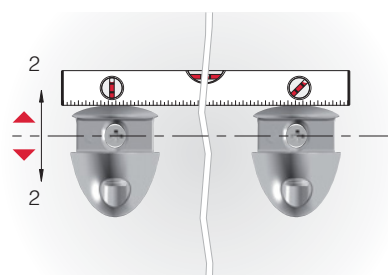


ASSEMBLING WITHOUT ADAPTER FOR GLASS 10 mm THICK




shelf locking

ASSEMBLING WITH ADAPTER FOR GLASS 8 mm THICK

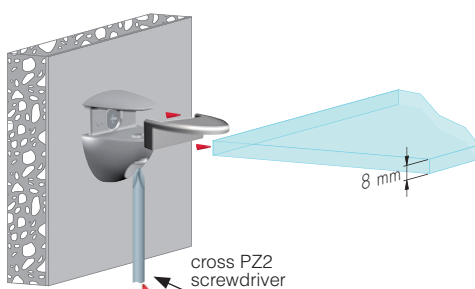


shelf locking

ASSEMBLING WITH ADAPTER FOR GLASS 5-6 mm THICK


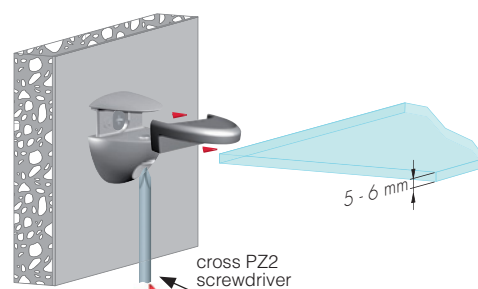



shelf locking

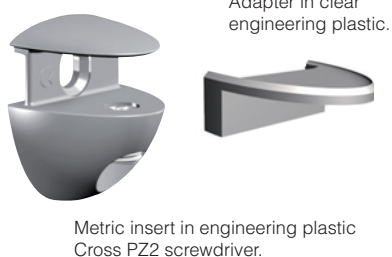

COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

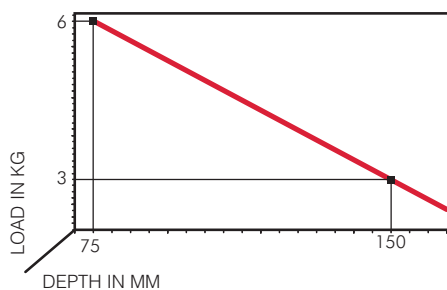


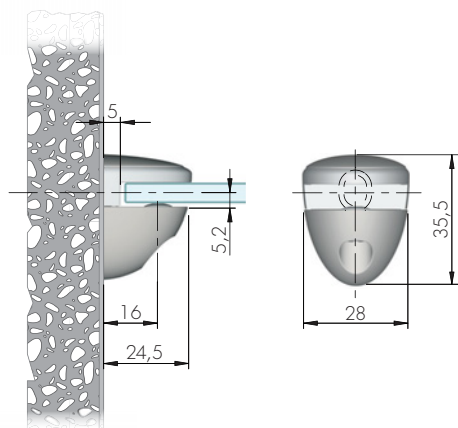

16101140YC

16101140KC


16101140KB

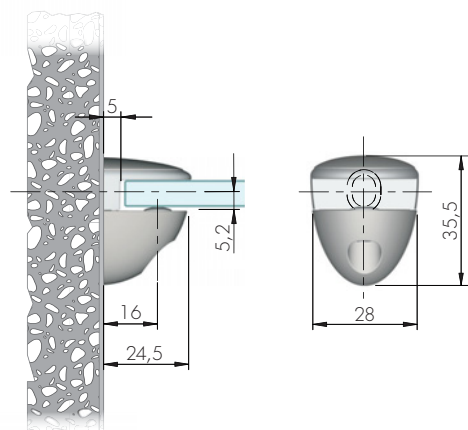

16101150YC

16101150KC

16101150KB

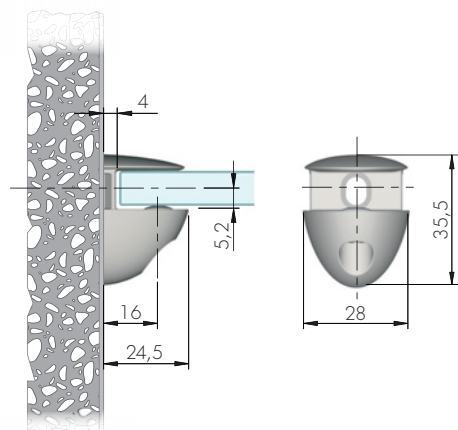


16101010YC

16101010KC

16101010KB

TRIADE MINI

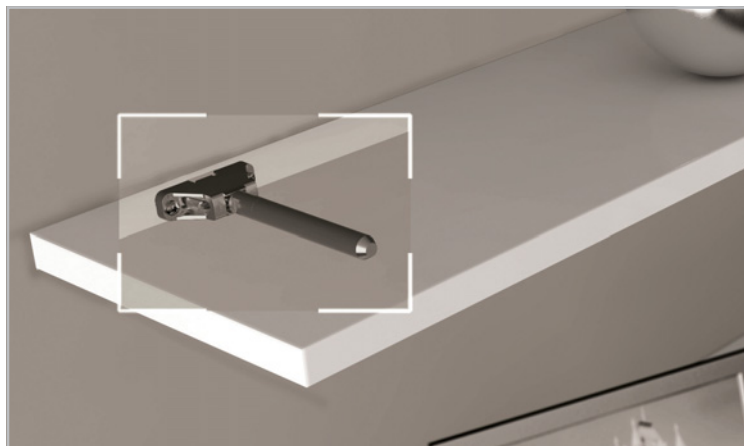

25 mm min.



4,5 kg for each shelf support
for shelf 200 mm deep




PAT. PENDING



INSTALLATION AND ADJUSTMENTS


WOOD PANEL

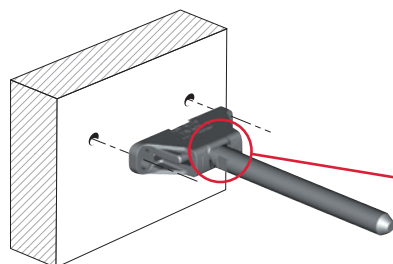


Recommended fixing pan head
screw type - head Ø 5 mm max.

VERY IMPORTANT

Triade Mini has to be installed
with the arrow facing upwards.



SOLID AND PLASTERBOARD PANEL

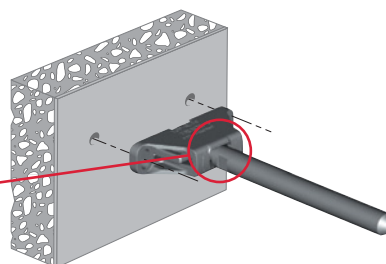


It is the responsibility of the customer:


- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.


BRACKET ALIGNMENT

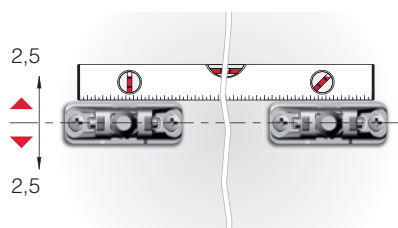

LATERAL ADJUSTMENT


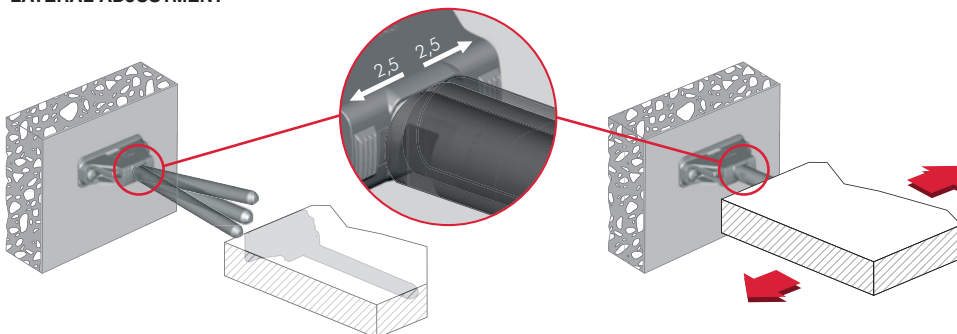


INCLINATION ADJUSTMENT

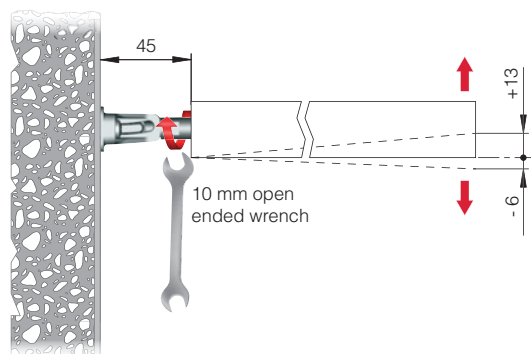



COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

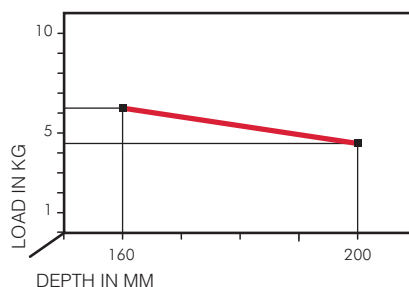


+ shelf weight = 4,5 kg MAX
for each shelf support


For installation details refer to "APPLICATION FOR ALL TRIADE VERSIONS"

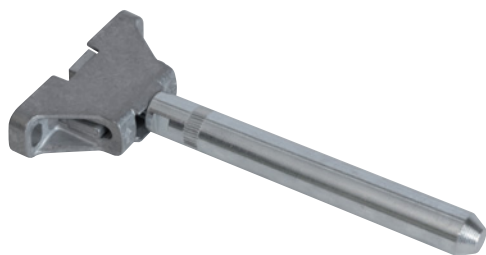

1621401000

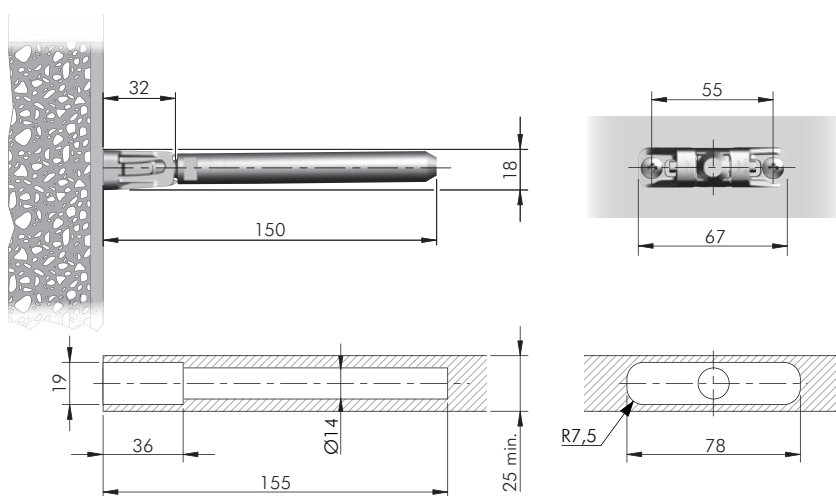

DRILL BIT FOR TRIADE MINI

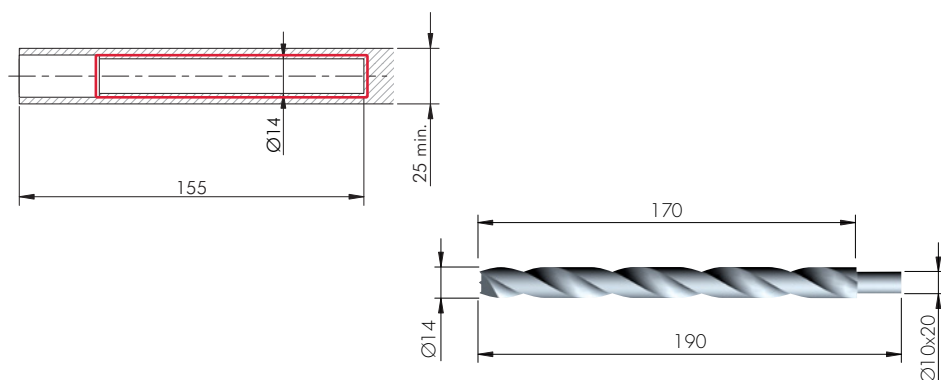


HSS

= on request



1621452000

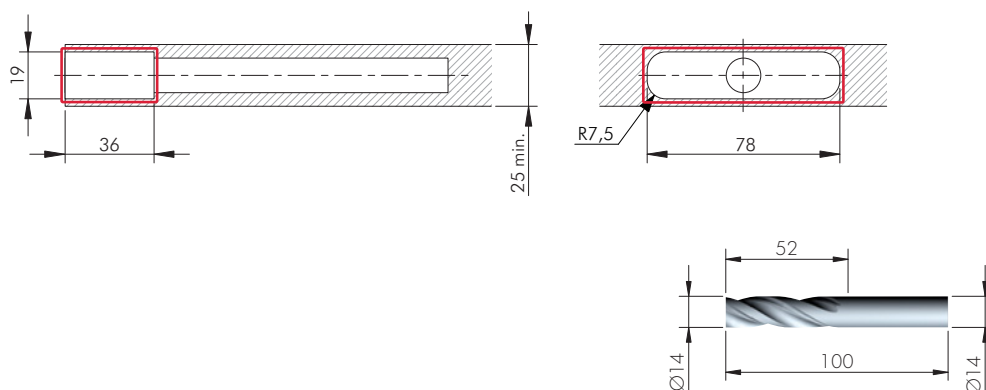

HSS

= on request



1621454000



TRIADE MINI AND BRACKET



25 mm min.



10 kg for each shelf support
for shelf 300 mm deep



PAT. PENDING




INSTALLATION

SOLID AND PLASTERBOARD PANEL

VERY IMPORTANT

Triade Mini has to be installed
with the arrow facing upwards.

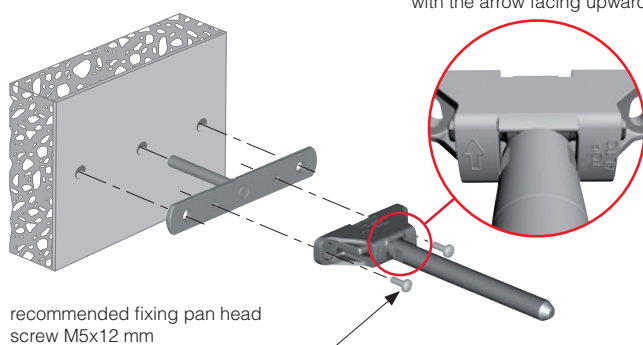



It is the responsibility of the customer:

- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

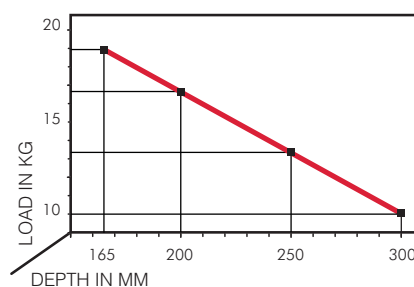


+ shelf weight = 10 kg MAX
for each shelf support

VERY IMPORTANT

- The capacity loading data stated in the chart refers to Triade Mini used in combination with the related wall bracket.

- It is strongly recommended to use the triade mini in combination with the related wall bracket, otherwise Italiana Ferramenta will not be held responsible for any failure.

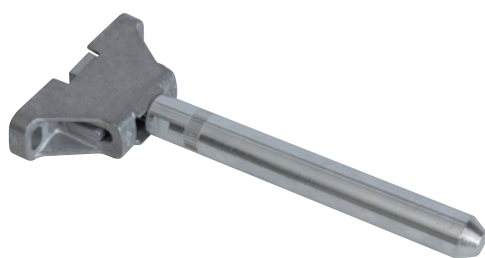

= PH2



= open ended wrench
10 mm



= 50 pcs.



1621401000



= M5




= 100 pcs.




16215040ZN







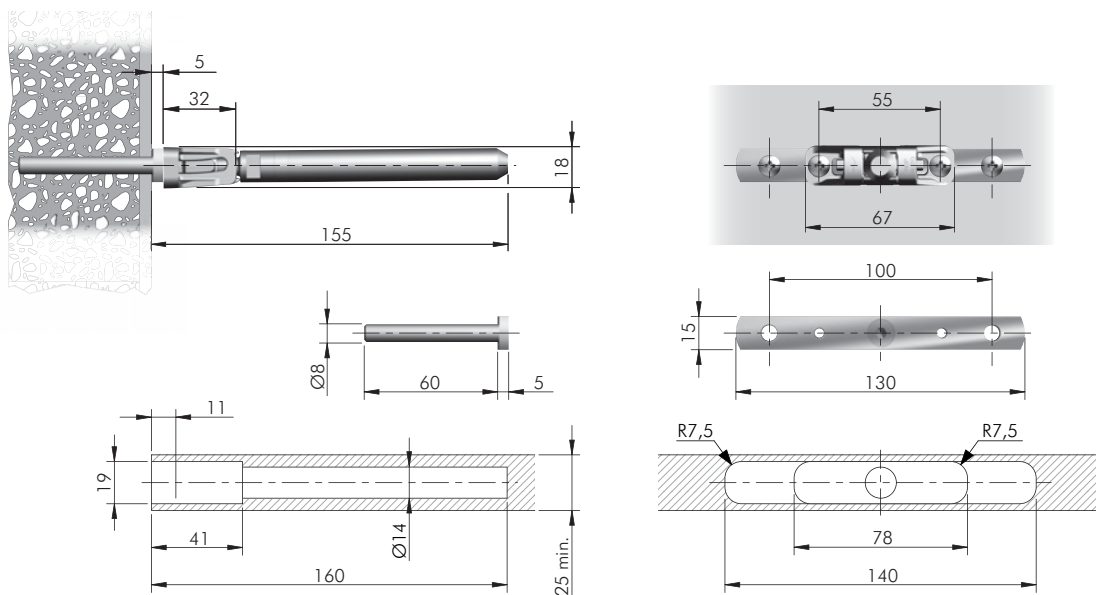

TRIADE MINI BRACKET FIXING ACCESSORY

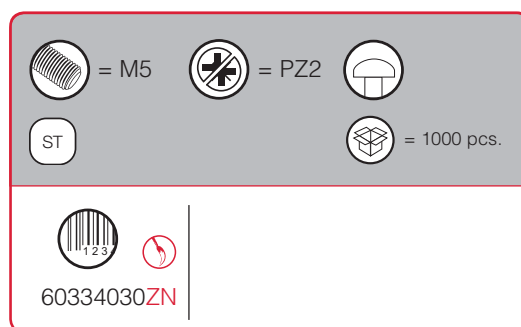

DRILL BIT FOR TRIADE MINI AND BRACKET

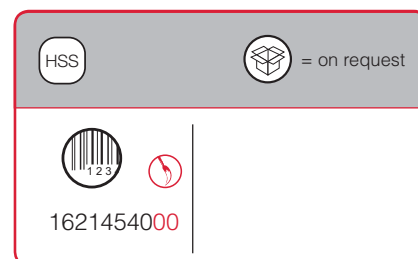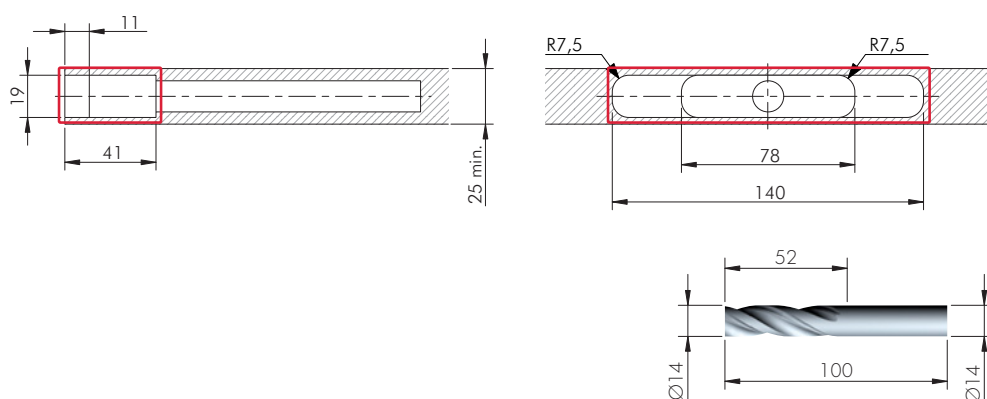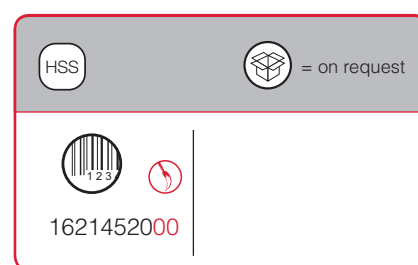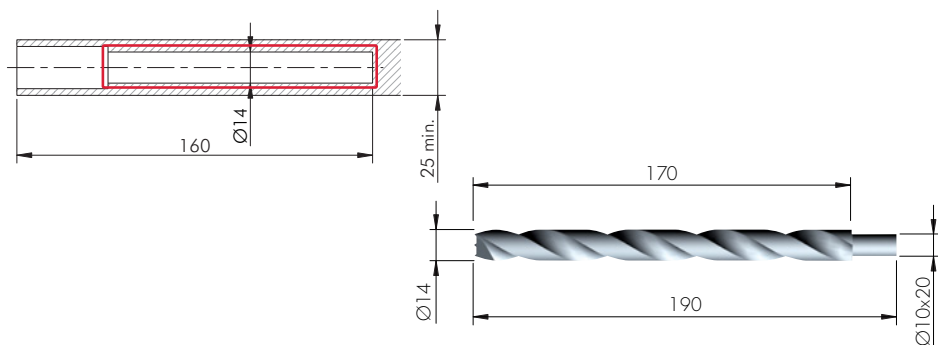

TRIADE



25-40 mm



15 kg for each shelf support
for shelf 300 mm deep




PAT. PENDING



INSTALLATION AND ADJUSTMENTS

WOOD PANEL

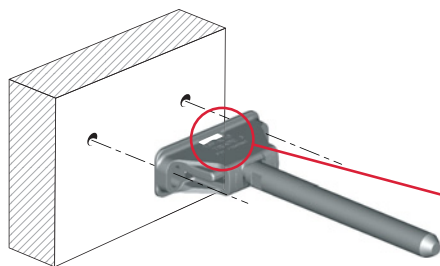


Recommended fixing pan head
screw type - head Ø 5 mm max.

VERY IMPORTANT

Triade has to be installed
with the writing "TOP - ALTO"
facing upwards.



SOLID AND PLASTERBOARD PANEL

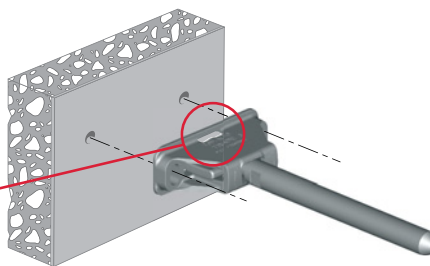


It is the responsibility of the customer:


- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.


BRACKET ALIGNMENT

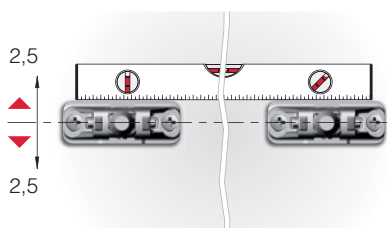

LATERAL ADJUSTMENT


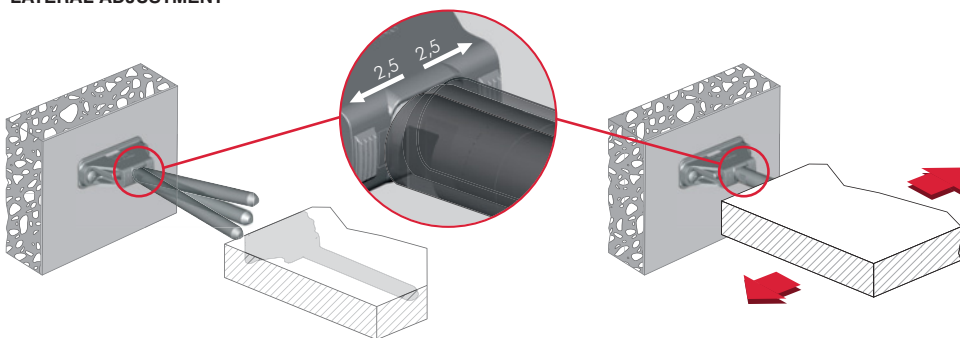


INCLINATION ADJUSTMENT

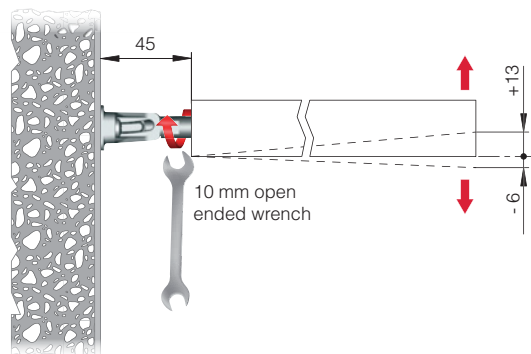




COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)






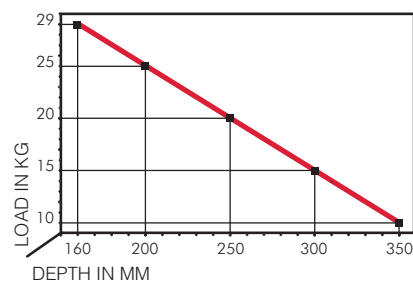


+ shelf weight = 15 kg MAX
for each shelf support




For installation details refer to "APPLICATION FOR ALL TRIADE VERSIONS"

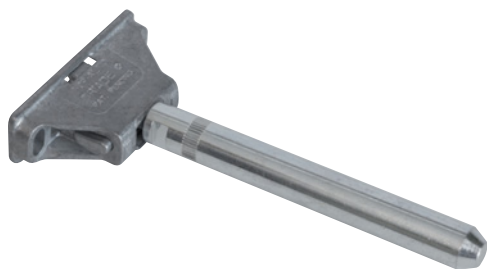






1621501000

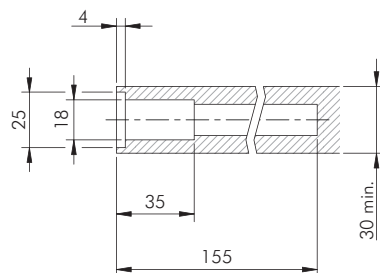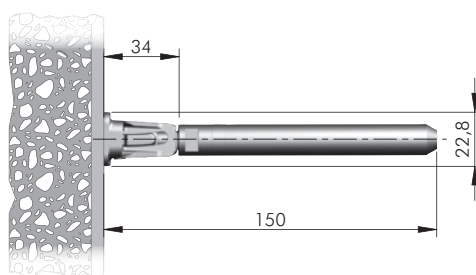

DRILL BIT FOR TRIADE

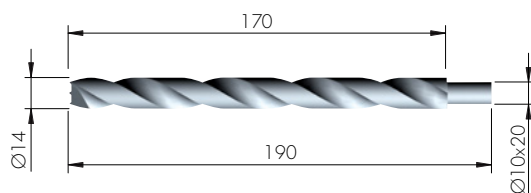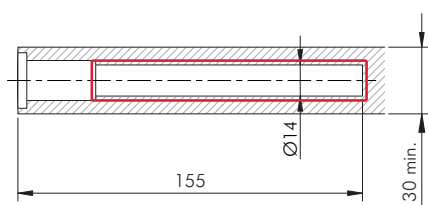

1621452000

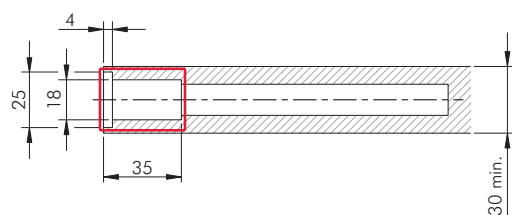


1621454000

TRIADE AND BRACKET

INSTALLATION

SOLID AND PLASTERBOARD PANEL

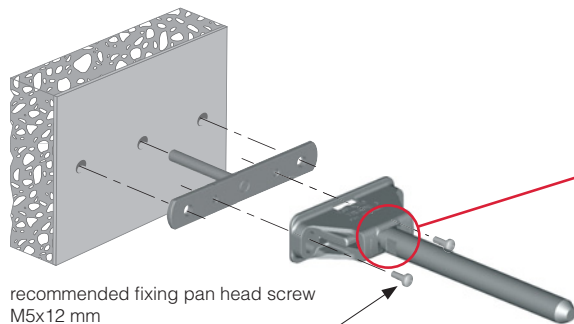

VERY IMPORTANT

Triade has to be installed with the writing "TOP - ALTO" facing upwards.

It is the responsibility of the customer:

- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.



= PZ2



= open ended wrench
10 mm

ZA

ST



= 50 pcs.



1621501000



= M5







ST




= 100 pcs.







16215020ZN

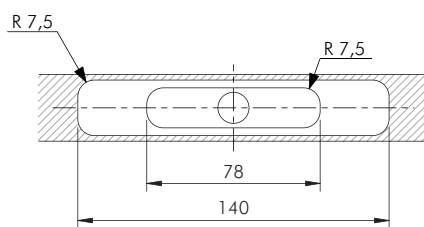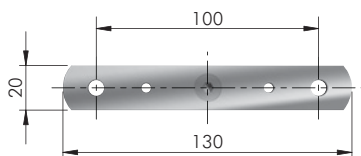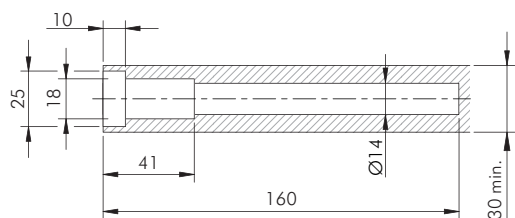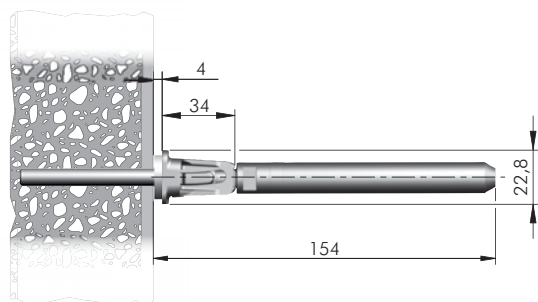

TRIADE BRACKET FIXING ACCESSORY

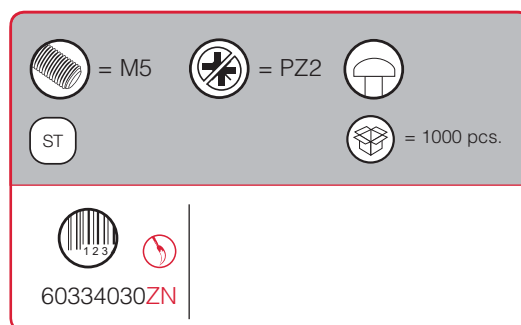


DRILL BIT FOR TRIADE AND BRACKET

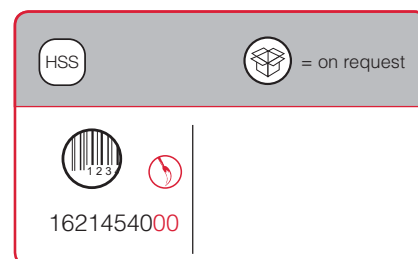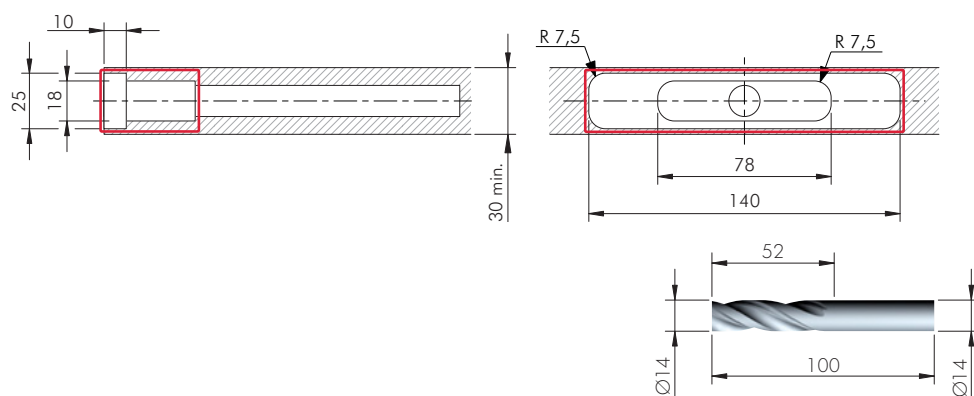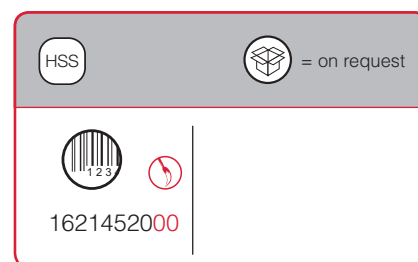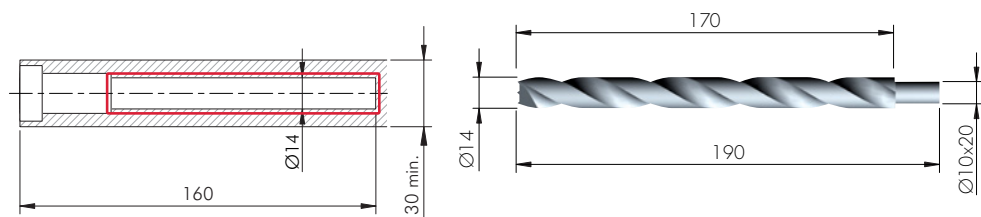

WOOD AND GLASS SHELVING SYSTEMS

TRIADE MAXI

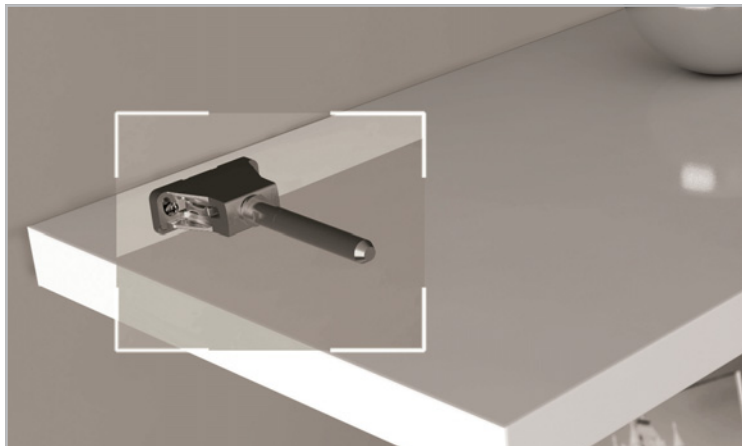

40 mm min.



20 kg for each shelf support
for shelf 400 mm deep




PAT. PENDING



INSTALLATION AND ADJUSTMENTS

WOOD PANEL

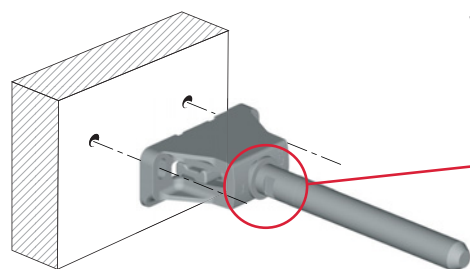


Recommended fixing pan head
screw type - head Ø 5 mm max.

VERY IMPORTANT

Triade Maxi has to be installed
with the arrow facing upwards.




SOLID AND PLASTERBOARD PANEL

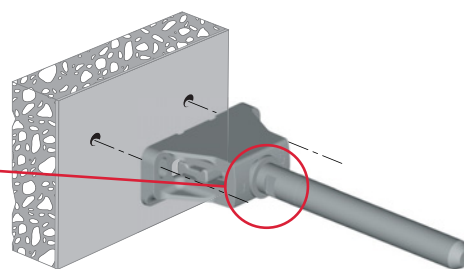


It is the responsibility of the customer:
- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.
For more specific information, please refer to the WARNINGS section at the end of the catalogue.


BRACKET ALIGNMENT

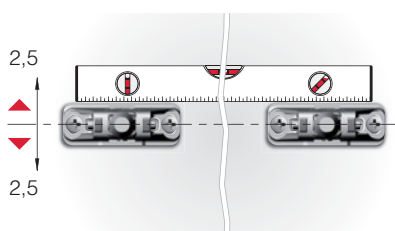

LATERAL ADJUSTMENT


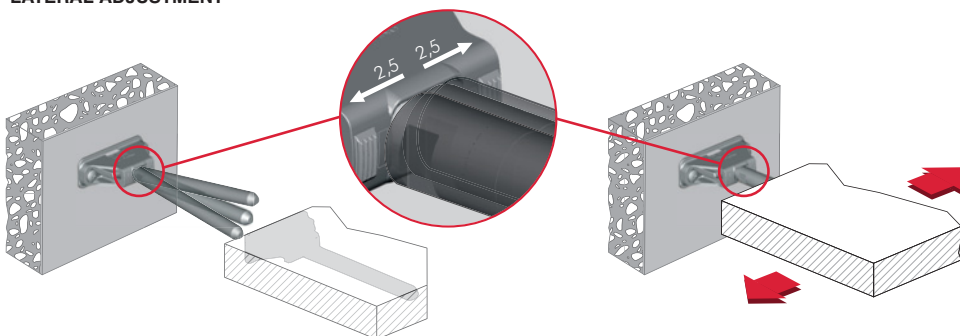


INCLINATION ADJUSTMENT

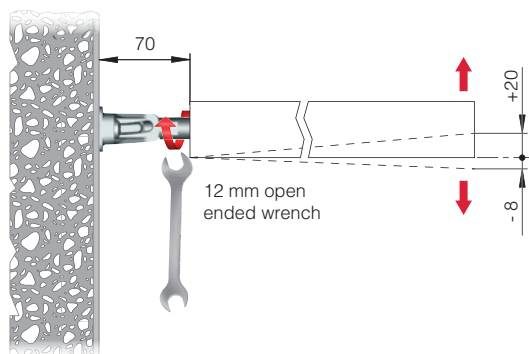



COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)


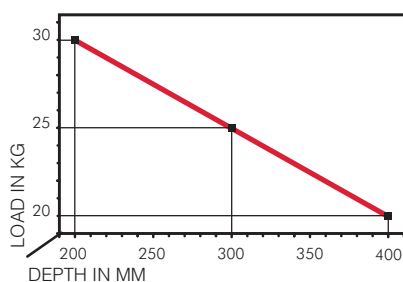


+ shelf weight = 20 kg MAX
for each shelf support



For installation details refer to "APPLICATION FOR ALL TRIADE VERSIONS"

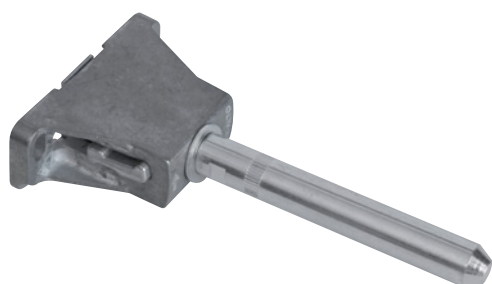



1621601000

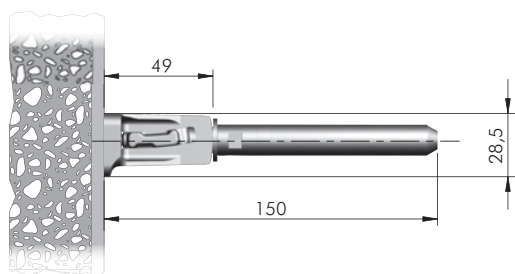





VERY IMPORTANT
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.

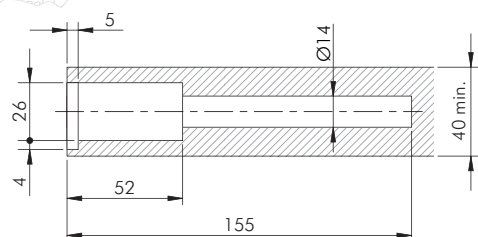

DRILL BIT FOR TRIADE MAXI

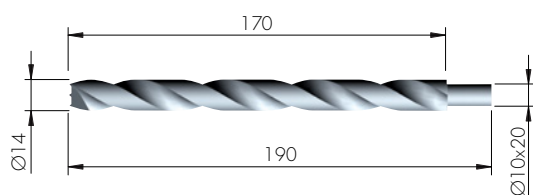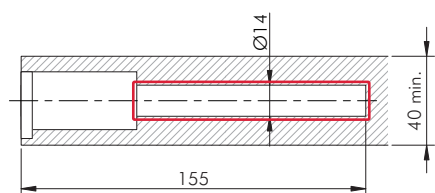

1621452000

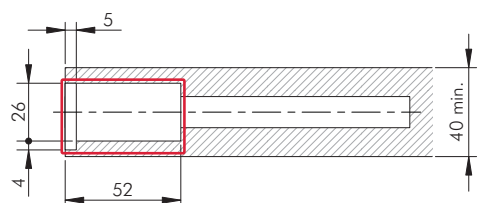


1621454000

TRIADE MAXI AND BRACKET

INSTALLATION

SOLID AND PLASTERBOARD PANEL

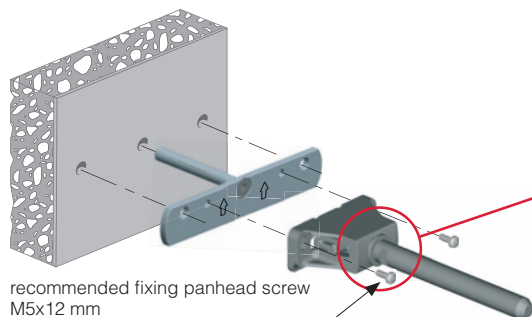

recommended fixing panhead screw
M5x12 mm






VERY IMPORTANT

Triade has to be installed with the writing
"TOP - ALTO" facing upwards.

It is the responsibility of the customer:



- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

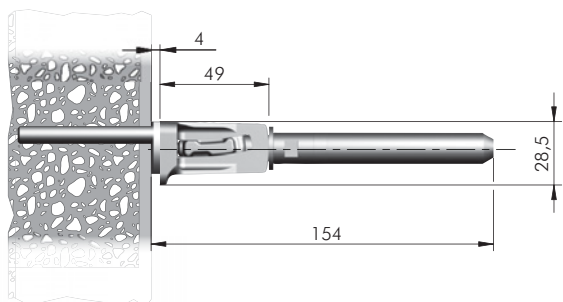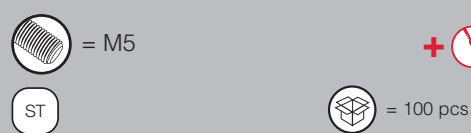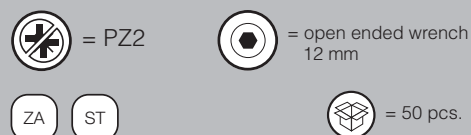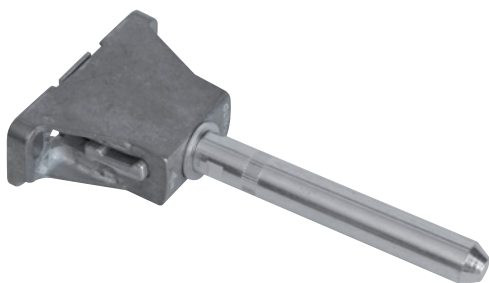


VERY IMPORTANT





Centre of the hole is
shifted 3,5 mm upwards.
Please keep in mind
when levelling the shelf.

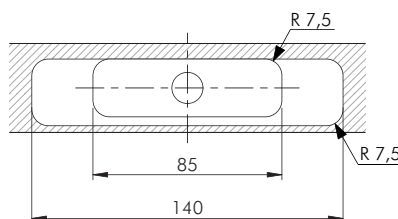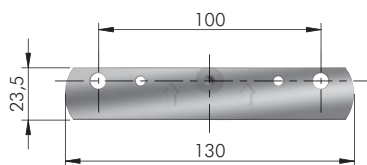

TRIADE MAXI BRACKET FIXING ACCESSORY

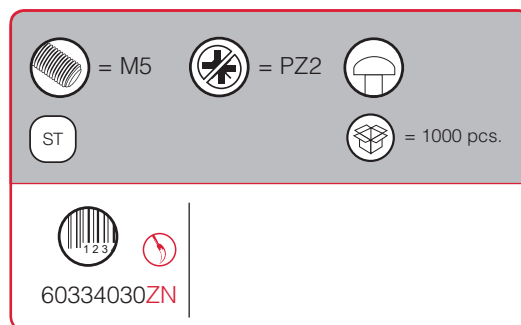


DRILL BIT FOR TRIADE MAXI AND BRACKET

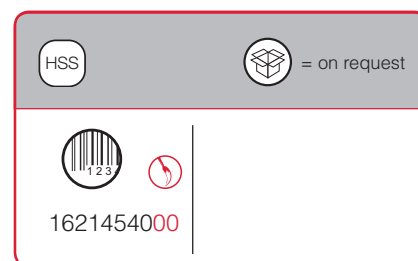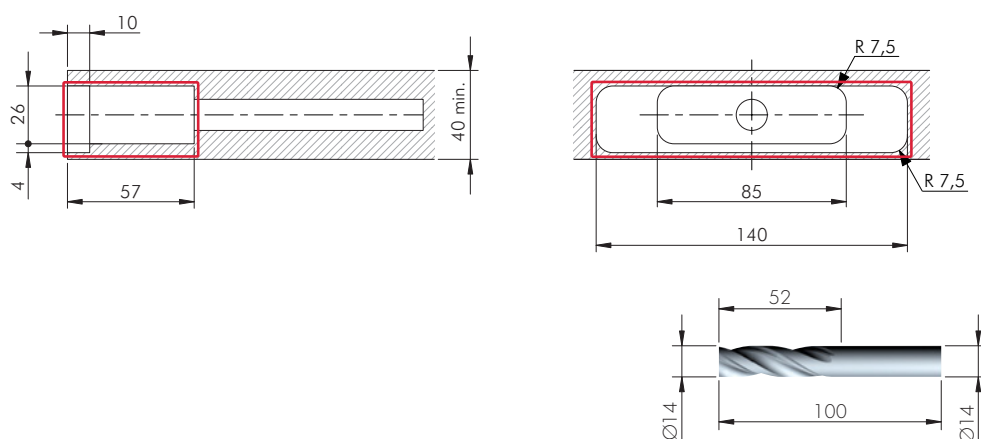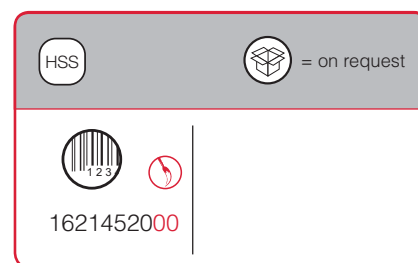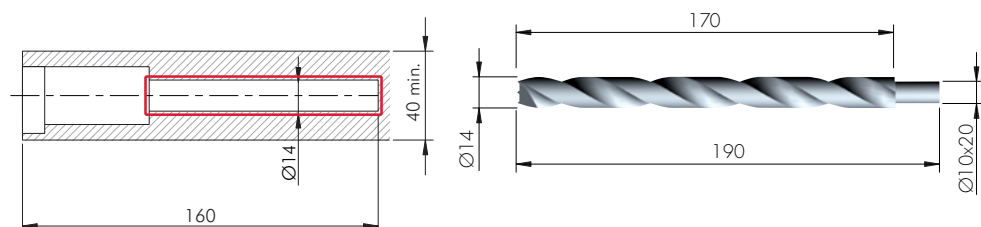

WOOD AND GLASS SHELVING SYSTEMS

TRIADE XXL

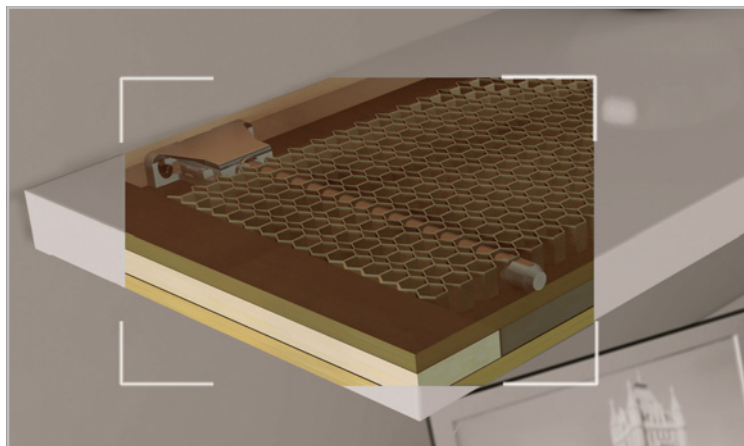

40 mm min.



20 kg for each shelf support
for shelf 400 mm deep



PAT. PENDING




INSTALLATION AND ADJUSTMENTS

WOOD PANEL


VERY IMPORTANT

Triade XXL has to be installed
with the arrow facing upwards.

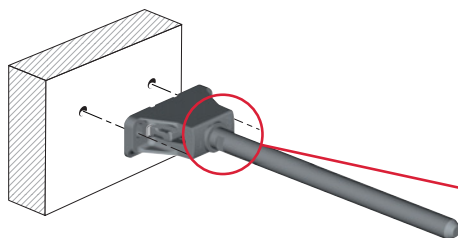

Recommended fixing pan head
screw type - head Ø 5 mm max.

SOLID AND PLASTERBOARD PANEL

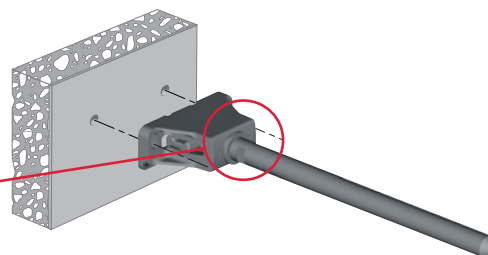



It is the responsibility of the customer:

- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.


For more specific information, please refer to the WARNINGS section at the end of the catalogue.

BRACKET ALIGNMENT

LATERAL ADJUSTMENT

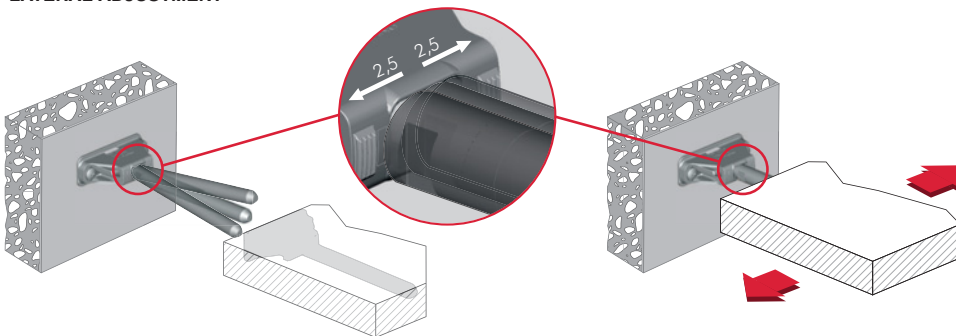
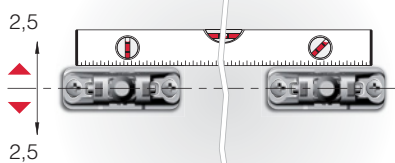


INCLINATION ADJUSTMENT

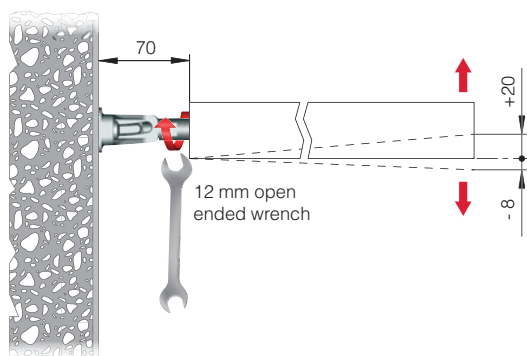


COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)


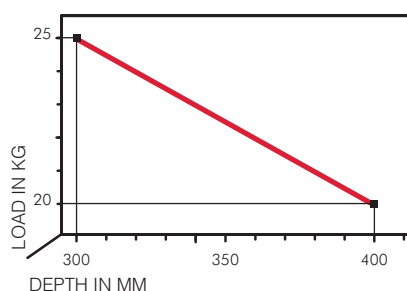


+ shelf weight = 20 kg MAX
for each shelf support



For installation details refer to "APPLICATION FOR ALL TRIADE VERSIONS"

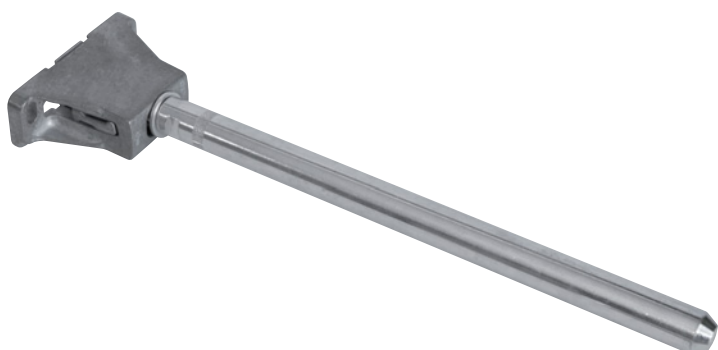




1621701000

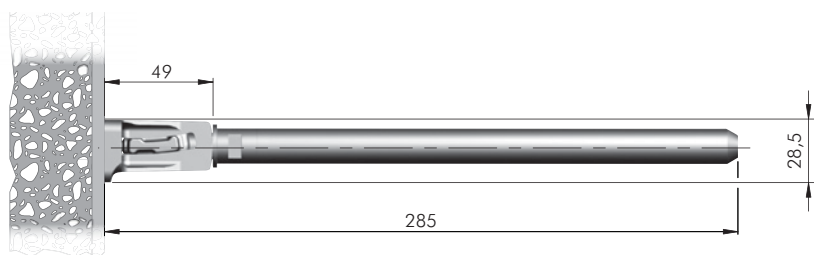




VERY IMPORTANT
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.

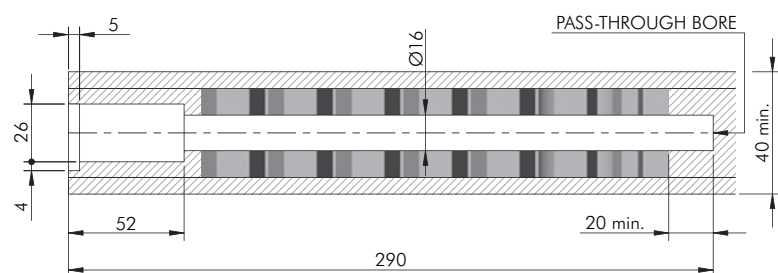

DRILL BIT FOR TRIADE XXL

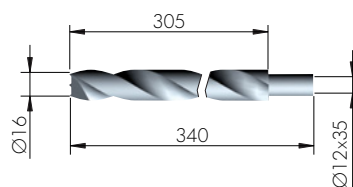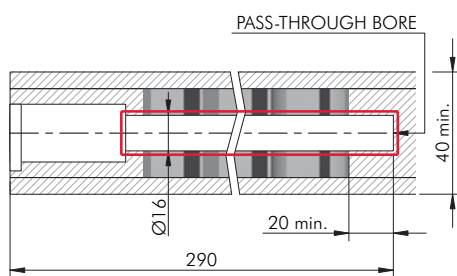

1621456000

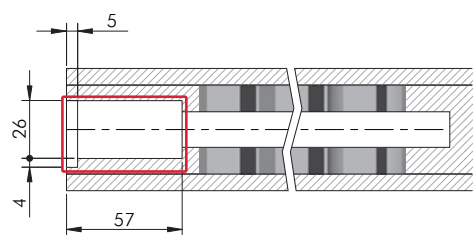


1621454000



TRIADE XXL AND BRACKET

INSTALLATION

SOLID AND PLASTERBOARD PANEL

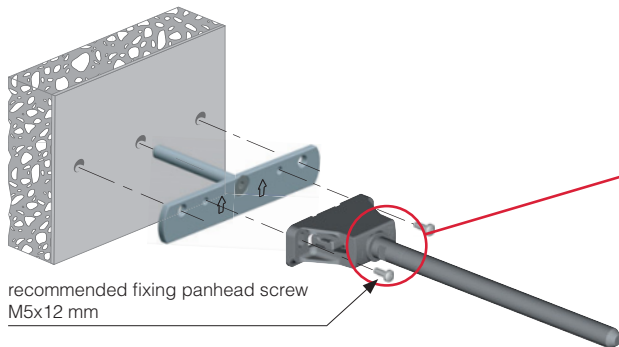


VERY IMPORTANT

Triade XXL has to be installed with the arrow facing upwards.

It is the responsibility of the customer:

- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

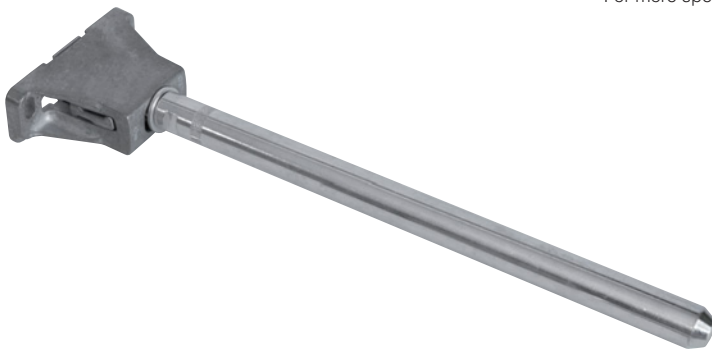

= PZ2 = open ended wrench 12 mm

ZA ST

= 25 pcs.



1621701000







= M5

ST



= 100 pcs.




16215030ZN

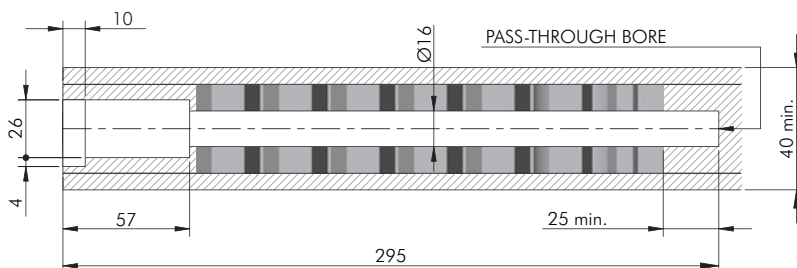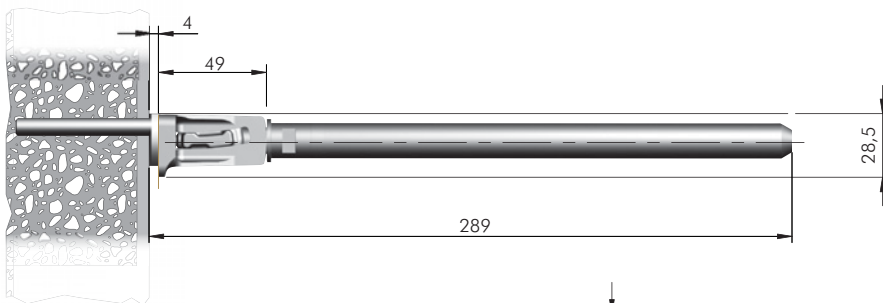








VERY IMPORTANT
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.

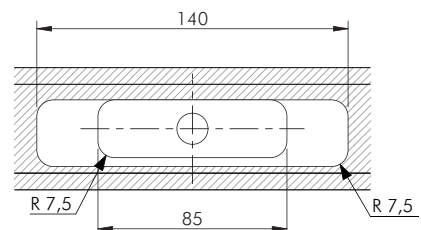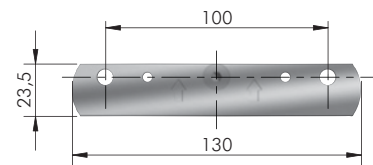

TRIADE MAXI BRACKET FIXING ACCESSORY

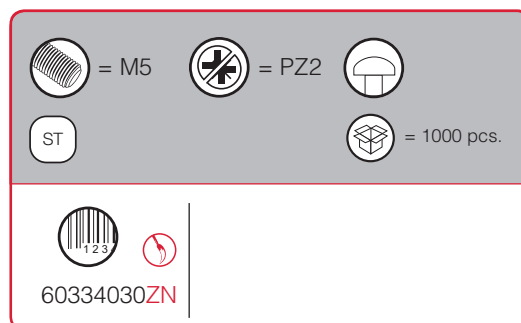


DRILL BIT FOR TRIADE XXL AND BRACKET

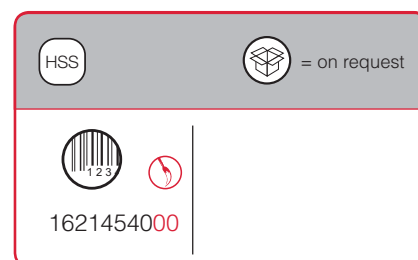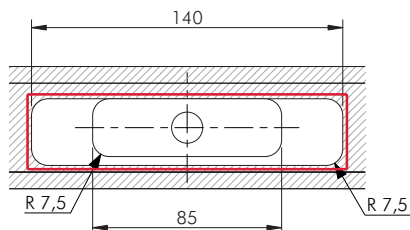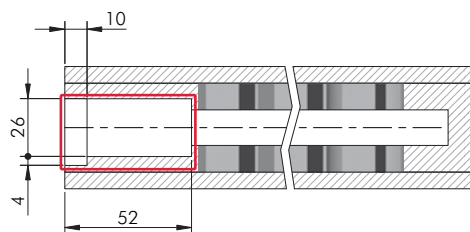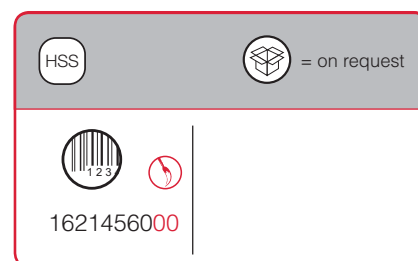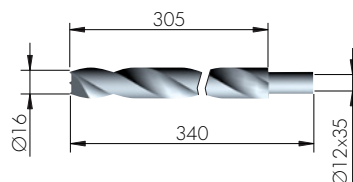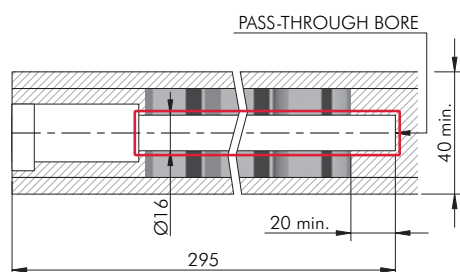


APPLICATION FOR ALL TRIADE VERSIONS

VERTICAL ADJUSTMENTS


RELEASE THE FIXING SCREWS

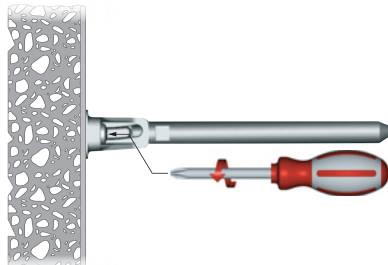

ALIGN BRACKETS VERTICALLY ACCORDINGLY

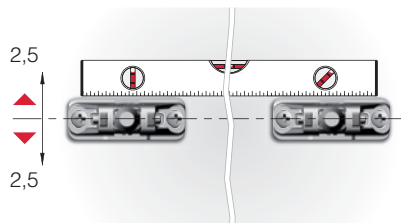


TIGHT THE FIXING SCREWS

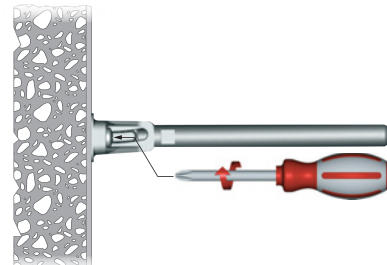


SHELF INSERTING AND LATERAL ADJUSTMENT



TILT THE SHELF TO MATCH BOTH SUPPORTING PINS AND SHELF HOUSINGS

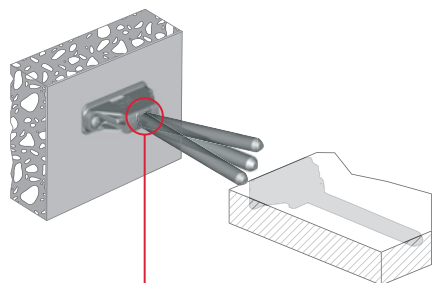

INSERT PARTIALLY THE SHELF

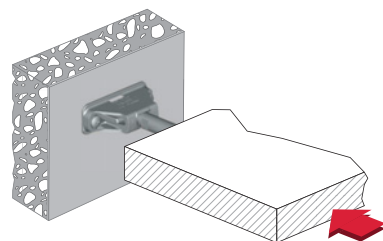


ADJUST THE SHELF Laterally ACCORDING TO THE APPLICATION (i.e. MULTI-SHELF COMPOSITION)

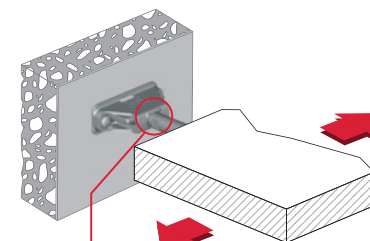


INCLINATION ADJUSTMENTS

TURN CLOCKWISE THE SUPPORTING PIN WITH A 10 - 12 mm OPEN-ENDED WRENCH TO ADJUST THE SHELF ANGLE FRONT TO BACK ACCORDINGLY

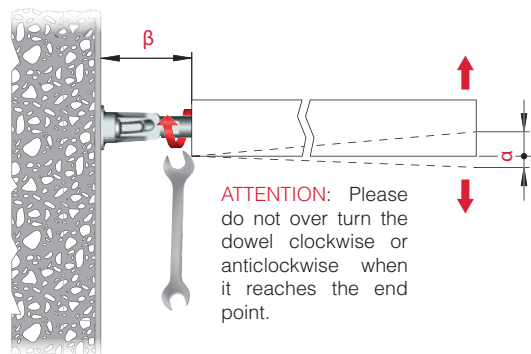


MODEL	β (mm)	α (mm)
TRIADE MINI	approx.45	-6 +13
TRIADE	approx.45	-6 +13
TRIADE MAXI	approx.70	-8 +20
TRIADE XXL	approx.70	-8 +20

SCREW THE LOCKING BOLT TO BLOCK THE PIN

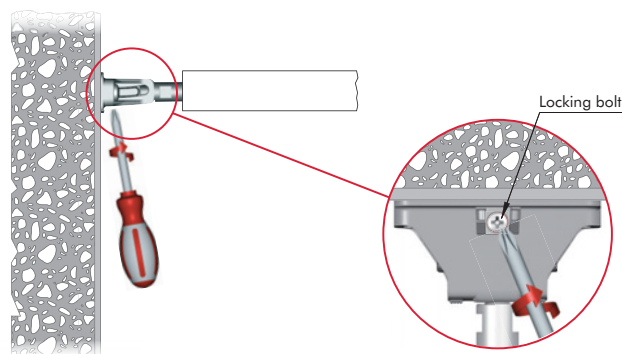

SHELF INSERTING FOR ALL TRIADE MODELS

PUSH THE SHELF AGAINST THE WALL UNTIL THE END

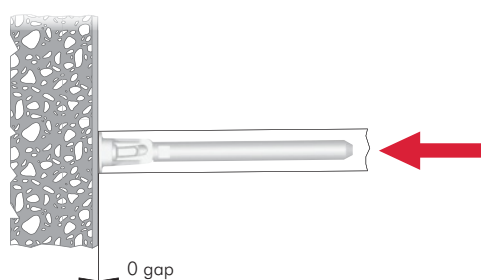

SHELF INSERTING FOR TRIADE MODEL ONLY, WITH DRILLING PLAN FOR SHELVES 25-29 mm THICK

PUSH THE SHELF AGAINST THE WALL UNTIL THE END

