



Intermat hinge with cup in Sensys design for corner cabinet folding doors

Hinge for corner cabinet folding doors without self closing feature (Intermat 9930), in obsidian black, overlay, Opening angle 50° / 65°, TH-drilling pattern 52 x 5.5 mm, for screwing on (-)

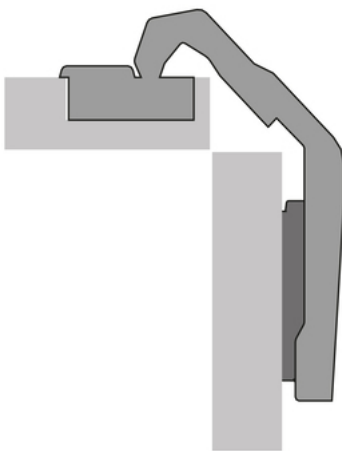

- Hinge for corner cabinet folding doors
- Without self closing feature (Intermat 9930)
- Quality classification under EN 15570, Level 2
- Opening angle 50° / 65°
- For door thickness 15 - 21 mm
- Door mounting option overlay
- TH - drilling pattern 52 x 5.5 mm
- Cup depth 12.8 mm
- Installation for screwing on
- Integrated diagonal adjustment +9.5 mm / -9.5 mm
- Integrated overlay adjustment, see sketch
- Integrated depth adjustment, see sketch
- Height adjustment at mounting plate
- steel / die-cast zinc in obsidian black

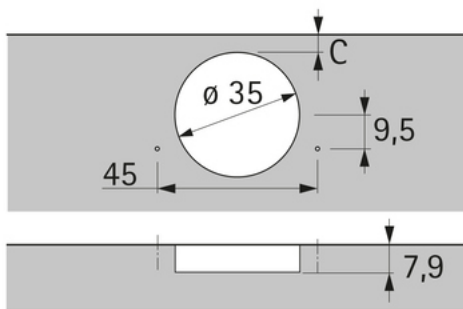

shop.hettich.com/ee_EN/p/9116394

Intermat hinge with cup in Sensys design for corner cabinet folding doors

Article Number 9116394

- **Hinge for corner cabinet folding doors without self closing feature (Intermat 9930), in obsidian black, overlay, Opening angle 50° / 65°, TH-drilling pattern 52 x 5.5 mm, for screwing on (-)**

FEATURE	VALUE
Door mounting option	overlay
Type of installation	for screwing on
Drilling pattern	TH 52 x 5,5 mm
Design	Corner unit with folding door
Door type	Corner cabinet folding door, Standard door / wooden door, Wood framed door (profile width from 50 mm), Aluminium framed door (profile width from 50 mm)
User friendly features	without self closing feature
Min. door thickness	15
Max. door thickness	21
Cup version	TH 52
Base	24
Cup diameter	35
Cup depth	12.8
Hinge surface finish	steel / die-cast zinc in obsidian black
Mounting hole	-
Diameter of mounting hole	Centre punch, Predrilled hole 2.5 mm Ø max.
Integrated overlay adjustment	+2 mm / -2 mm
Stay closed function	No
Finish	in obsidian black
Order no.	9116394
PU	50

Safety instructions

	Follow instructions
	Keep away from children
	Attention shipping packaging! Fittings may fall out if opened carelessly.
	Attention! Only suitable for indoor use and the usual climatic conditions there
	Caution! Ensure a suitable choice of material.
	Warning against incorrect assembly due to the use of incorrect tools.
	Caution! Use adjusting devices with care. Risk of injury due to slipping.